



TYRESÖSTÖTTAN – LCKG Galvanized keel stand

Demountable hot-dip galvanized steel stand. Worry-free installation and maintenance with best operating reliability.



Profiled hull pad of quality rubber – best friction and protection.
LxWxH 310x160x25 mm/12,2x6,3x0,98 inch.
Rubber Grey EPDM.



Hot-dip galvanized steel V-top plate – easy, worry-free installation and maintenance.

Hot-dip galvanized, trapezoidal threaded rod and winged nut – fast and easy adjustment.

Stainless steel screw/locking nut.

Stainless steel screw/locking nut.


Hot-dip galvanized.

LCKG Keel Stand

NEW



| Type | Max load (kg/lbs) | Height (mm/inch) | | Weight (approx. kg/lbs) | Gross weight (approx. kg/lbs) | Box size LxWxH (mm/inch) |
|--------|-------------------|------------------|--------|-------------------------|-------------------------------|---------------------------|
| | | ~ min | ~ max | | | |
| LCKG 3 | 2750/6062 | 590/23 | 750/30 | 13,5/29 | 14,5/32 | 530x490x175/20,9x19,3x6,9 |
| LCKG 4 | | 420/16 | 580/22 | 10,7/23 | 12,5/27 | 530x400x175/20,9x15,7x6,9 |

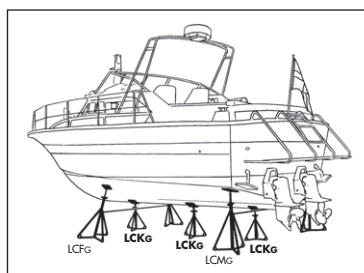

Maskinfabriken G-C A.B.
 Thulevägen 18, S-135 55 TYRESÖ
 Phone. +46 8 712 50 90
 info@gcboathandling.com
 info@tyresovaggan.com
 www.gcboathandling.com
 www.tyresovaggan.com