



## TYRESÖSTÖTTAN – LCKg Galvanized keel stand

Demountable hot-dip galvanized steel stand with integrated quick couplers for safety chain – easy, worry-free installation and maintenance with best operating reliability.



Profiled hull pad of quality rubber – best friction and protection.  
LxWxH 310x160x25 mm/12,2x6,3x0,98 inch.  
Rubber Grey EPDM.



Hot-dip galvanized steel V-top plate (stainless steel screw/locking nut) – easy, worry-free installation and maintenance.

Hot-dip galvanized, trapezoidal threaded rod and winged nut – fast and easy adjustment.

Stainless steel screw/locking nut.

Hot-dip galvanized.



Mitered end.

Stainless steel screw/locking nut.

### LCKg Keel Stand



| Type   | Max load (kg/lbs) | Height (mm/inch) |        | Weight (approx. kg/lbs) | Gross weight (approx. kg/lbs) | Box size LxWxH (mm/inch)  |
|--------|-------------------|------------------|--------|-------------------------|-------------------------------|---------------------------|
|        |                   | ~ min            | ~ max  |                         |                               |                           |
| LCKg 5 | 5000/11023        | 540/21           | 770/30 | 19,4/42                 | 21/46                         | 520x390x160/20,5x15,4x6,3 |
| LCKg 7 |                   | 760/30           | 990/39 | 23/50                   | 25/55                         | 830x490x160/32,7x19,3x6,3 |

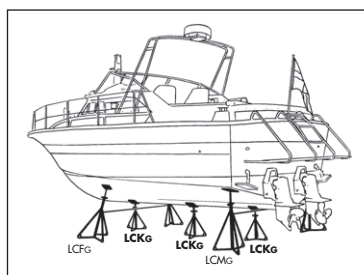

**Maskinfabriken G-C A.B.**  
Thulevägen 18, S-135 55 TYRESÖ  
Phone. +46 8 712 50 90  
info@gcboathandling.com  
info@tyresovaggan.com  
www.gcboathandling.com  
www.tyresovaggan.com