

TYRESÖSTÖTTAN – SBS Galvanized sailboat stand

HOT-DIP GALVANIZED STEEL TOP PLATE WITH PROFILED HULL PAD OF QUALITY RUBBER.



10x10 inch/255x255 mm
Grey EPDM 60 shA




NEW

Profiled hull pad of quality rubber – best friction and protection.

Hot-dip galvanized, trapezoidal threaded rod and winged nut – fast and easy adjustment.

Hot-dip galvanized steel top plate (stainless steel screw/locking nut) with integrated quick couplers for safety chain – easy, worry-free installation and maintenance.

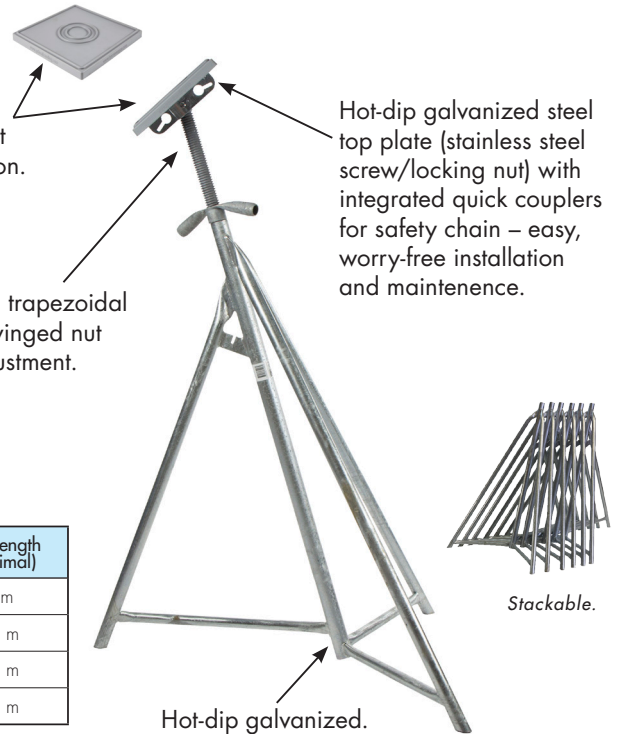

Hot-dip galvanized.

Stackable.

Type	Height of stand (meter) ~	Max load per stand (ton) ~	Weight (kilo)
SBS-4	0,61–0,91	3,6	12,4
SBS-3	0,89–1,32		16,2
SBS-2	1,22–1,65		18,9
SBS-1	1,63–2,06		23,5
SBS-0	2,01–2,44		26,1

Number of stands	Boat length (maximal)
4–6	9 m
6–8	12 m
8–10	15 m
10–12	18 m

TYRESÖSTÖTTAN – MBS Galvanized motorboat stand

HOT-DIP GALVANIZED STEEL TOP PLATE WITH PROFILED HULL PAD OF QUALITY RUBBER.



12,2x6,3 inch/310x160 mm
Grey EPDM 60 shA




NEW

Profiled hull pad of quality rubber – best friction and protection.

Hot-dip galvanized, trapezoidal threaded rod and winged nut – fast and easy adjustment.

Hot-dip galvanized steel top plate (stainless steel screw/locking nut) with integrated quick couplers for safety chain – easy, worry-free installation and maintenance.

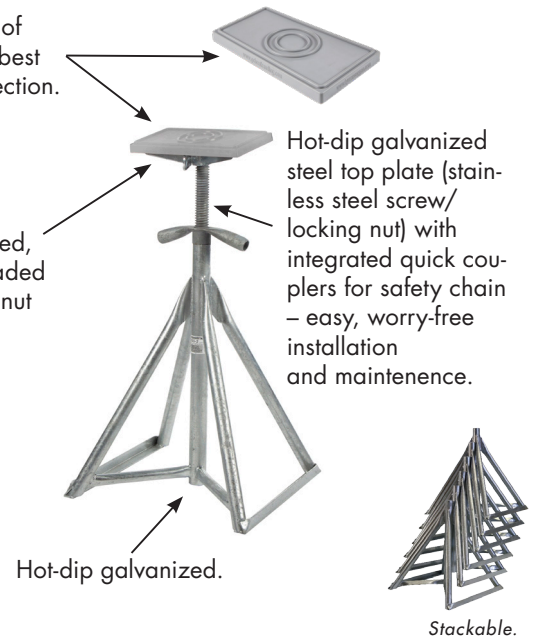



Hot-dip galvanized.

Stackable.

Type	Height of stand (meter) ~	Max load per stand (ton) ~	Weight (kilo)
MBS-4	0,46–0,64	3,6	12,7
MBS-3	0,64–0,97		13,4
MBS-2	0,74–1,17		15,2
MBS-1	0,84–1,27		15,6
MBS-0	1,04–1,47		16,0

Number of stands	Number of KS	Boat length (maximal)
4–6	2–3	9 m
6–8	3–4	12 m
8–10	4–5	15 m
10–12	5–6	18 m

Safety Chain must always be used between the pair of stands



Maskinfabriken G-C A.B.

Thulevägen 18, S-135 55 TYRESÖ

Phone. +46 8 712 50 90

info@gcboathandling.com

info@tyresovaggan.com

www.gcboathandling.com

www.tyresovaggan.com